


PERFORMANS

Model	Koruma Sınıfı	m ³ /h	Pa	W	dB(A)*
Muro 100	IPX4	95	29	11	39
Muro 120	IPX4	180	43	15	42
Muro 150	IPX4	320	70	25	49

dB(A)* 3 metre mesafeden, 230V-50Hz.

ÖLÇÜLER

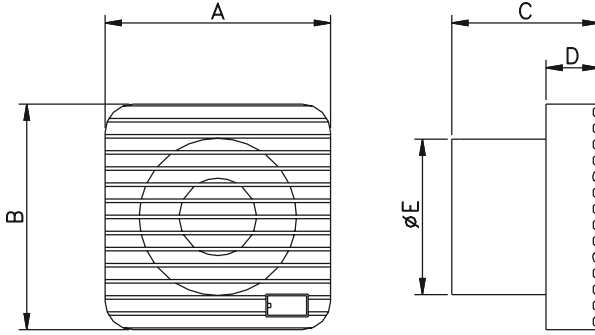

Model	A	B	C	D	E	kg
Muro 100	140	140	92	33	97	0,7
Muro 120	160	160	103	33	119	0,8
Muro 150	180	180	128	33	148	1,2



EU 1253/2014 yönetmeliği ve ERP 2009/125/CE direktifine uygundur.

- Hava doğrudan veya bir kanal (max. 3m) ile tahliye edilebilir.
- Tuvalet, banyo ve mutfaklar için uygundur.
- 3 farklı bağlantı çapı Ø100, Ø120 Ø150
- Darbeye dayanıklı yüksek kaliteli teknopolimerden üretilmiştir.
- Sessiz çalışmaya uygun ve uzun ömürlü kayar yatağa sahiptir.
- Aşırı ısınmaya dayanıklı indüksiyon motora sahiptir. 230V-50Hz.
- Kolay bakım ve temizlik

EĞRİLER

